





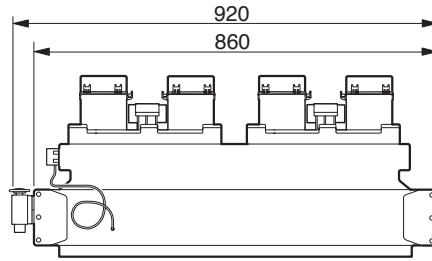



CE - 850 • 12V • 3730-905
CE - 851 • 24V • 3730-906





CEILING MOUNT EVAPORATOR

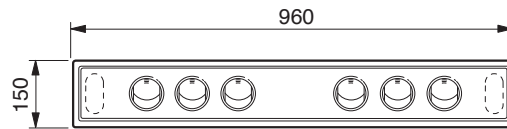



3801-205
 Front with 6 louvers
 and 2 rear connections
 for flexhose 2.5"

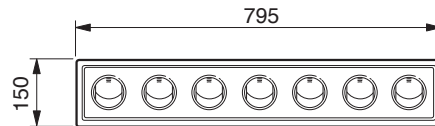



3801-206
 Front with 7 louvers

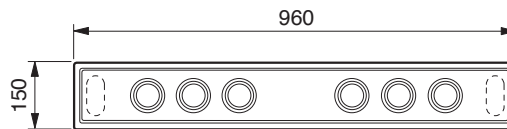



3801-207
 Front with 6+2
 rear connections
 for flexhose 2.5"

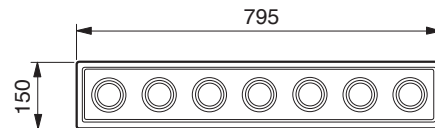

3801-208
 Front with 7 connections
 for flexhose 2.5"

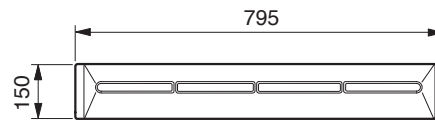

3801-209
 Front for central duct or
 flat duct between vehicle's
 roof and ceiling



3801-210
 Front with 2 connections
 for flexhose 4" (for side ducts)

GB	D	E	F	I	
Nominal technical data	Nominale technische Daten	Datos técnicos nominales	Données techniques nominales	Dati tecnici nominali	
Cooling capacity	Kühlkapazität	Potencia frigorífica	Puissance frigorifique	Potenza frigorifera	8.5Kw
Working voltage	Stromspannung	Tensión de alimentación	Tension d'alimentation	Voltaggio di funzionamento	12V d.c. 24V d.c.
Power consumption	Stromverbrauch	Intensidad absorbida	Courant absorbé	Corrente assorbita	32A -12V 16A -24V
Airflow (at zero static pressure)	Luftstrom	Caudal de aire	Débit d'air	Portata aria	1600m ³ /h
Total weight	Gewicht	Peso total	Poids total	Peso complessivo	10.5Kg 11.5Kg